

LUCAPA DIAMOND COMPANY

ASX Announcement 16 February 2023

#### DIAMONDS RECOVERED FROM TWO LULO KIMBERLITE BULK SAMPLES

#### **KEY HIGHLIGHTS**

- 23 diamonds recovered from an additional 365m³ bulk sample from kimberlite L164
  - Total weight 16.32 carats, grade of 4.47 cphm<sup>3</sup> highest grade recovered from a bulk sample at Lulo
  - Largest diamond recovered from sample was 2.38 carats
  - o Average stone size 0.71 carats
  - o Sample taken from a different area of the kimberlite to larger L164/01 sample, which yielded 41 diamonds at a grade of 3.00 cphm<sup>3</sup>
  - o Follow up drilling and sampling to be carried out
- 13 diamonds recovered from a 902m³ bulk sample from kimberlite target L056
  - o Total weight 7.85 carats, grade of 0.87 cphm<sup>3</sup>
  - o Largest diamond recovered from sample was 2.08 carats
  - o Average stone size 0.60 carats
  - o A further sample to be excavated and processed

Lucapa Diamond Company Limited (ASX: **LOM**) ("Lucapa" or "the Company") together with our Project Lulo partners, Endiama and Rosas & Petalas, are pleased to advise it has recovered 23 diamonds from a second sample from kimberlite L164 and 13 diamonds from kimberlite L056.

Lulo kimberlite bulk sample KBS/164/02, totalling 365m³ of kimberlite material was processed through the Lulo Kimberlite Bulk Sample Plant, yielding 16.32 carats at a recovered grade of 4.47cphm³, with the largest diamond recovered weighing 2.38 carats. This is the highest grade yet recovered from a Lulo kimberlite bulk sample and is very encouraging for an early stage, small sample.



Picture: Bulk sample from KBS/164/02 showing the 23 diamonds recovered and the largest stone (bottom) recovered from the sample, a 2.38 carat diamond as well as a 0.71 carat diamond (top left)

This is the second sample processed from kimberlite L164, which was excavated from a different area of the kimberlite to the previous sample KBS/L164/01.

The total result of the two samples KBS/164/01 and 02 are set out below:

Sample ID	Volume processed (in-situ m³)	Stones recovered	Carats recovered (carats)	Calculated grade (cphm³)	Average stone size (carats/stone)	Number of stones greater than one carat	Largest stone pre- acid (carats)
KBS/164/02	~365	23	16.32	~4.47	~0.71	5	2.38
KBS/164/01a*	~485	20	15.51	~3.20	~0.78	5	1.95
KBS/164/01b*	~1,715	21	50.54	~2.95	~2.41	7	15.27
Total	2,565	64	82.37	~3.21	1.29	17	15.27

\*As per ASX announcement on 16 January 2023


Kimberlite L164 is on the list of kimberlites selected for follow up work after the completion of the priority target bulk sampling program.

A 902 m³ bulk sample taken from kimberlite L056 (KBS/056/01) was also processed recovering 13 diamonds with a total weight of 7.85 carats at a recovered grade of 0.87cphm³, the largest weighing 2.08 carats. The sample location was within the Cacuilo flood plain and proved difficult to excavate in the wet season. A further sample from kimberlite L056 is planned to be excavated and processed when ground conditions allow.



Picture: Bulk sample from L056 showing the 13 diamonds recovered and the largest stone recovered from the sample (right) a 2.08 carat diamond

Kimberlite L164 is located south (upstream) of the Canguige Catchment area and was placed on the priority kimberlite bulk sample list due to its indicator mineral content. Kimberlite L056 is located near to mining block 57 and is adjacent to the Canguige catchment.

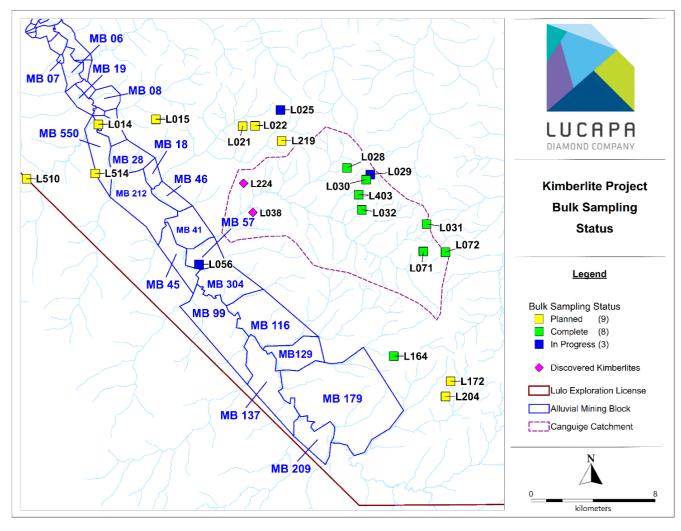

Map: Location of kimberlites L056 and L164 in the Cacuilo Valley and other priority kimberlites on the Lulo concession

Authorised by the Lucapa Board.

# STEPHEN WETHERALL MANAGING DIRECTOR

For further information, please contact:

#### CANDICE SGROI

#### **HEAD OF INVESTOR RELATIONS & CORPORATE COMMUNICATIONS**

Lucapa Diamond Company Limited

Tel: 0400 49 22 85

Email: csgroi@lucapa.com.au

#### **ABOUT LUCAPA**

Lucapa is an ASX listed diamond miner and explorer with assets in Africa and Australia. It has interests in two producing diamond mines in Angola (Lulo, in which LOM holds 40%) and Lesotho (Mothae, in which LOM holds 70%). The large, high-value diamonds produced from these two niche African diamond mines attract some of the highest prices per carat for rough diamonds globally.

The Lulo mine has been in commercial production since 2015, while the Mothae mine commercial production in 2019.

In 2021, through its wholly owned subsidiary, Australian Natural Diamonds Pty Ltd, Lucapa completed the strategic and transformative acquisition of the Merlin Diamond Project, an historic Australian mine in the Northern Territory of Australia. A feasibility study is expected to be completed in Q1 2023.

Lucapa and its project partners are also exploring for potential primary source kimberlites or lamproites at the prolific Lulo concession in Angola, the Brooking and Merlin projects in Australia and the Orapa Area F project in Botswana.

The Board, management and key stakeholders in Lucapa have deep global diamond industry experience and networks all through the value chain from exploration to retail.

#### **Competent Person's Statement**

Information included in this announcement that relates to exploration results and resource estimates is based on and fairly represents information and supporting documentation prepared and compiled by Richard Price MAusIMM who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Price is an employee of Lucapa Diamond Company Limited. Mr Price has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves. Mr Price consents to the inclusion in the announcement of the matters based on this information in the form and context in which it appears.

#### **No New Information**

To the extent that this announcement contains references to prior exploration results, a production target and financial information derived from a production target and Mineral Resource estimates, which have been cross referenced to previous market announcements made by the Company, unless explicitly stated, no new information is contained. The Company confirms that it is not aware of any new information or data that materially affects the information included in the relevant market announcements and, in the case of estimates of a production target and financial information derived from a production target and Mineral Resources that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed.

#### **Forward-Looking Statements**

This announcement has been prepared by the Company. This document contains background information about the Company and its related entities current at the date of this announcement. This is in summary form and does not purport to be all inclusive or complete. Recipients should conduct their own investigations and perform their own analysis in order to satisfy themselves as to the accuracy and completeness of the information, statements and opinions contained in this announcement.

This announcement is for information purposes only. Neither this document nor the information contained in it constitutes an offer, invitation, solicitation or recommendation in relation to the purchase or sale of shares in any jurisdiction. This announcement may not be distributed in any jurisdiction except in accordance with the legal requirements applicable in such jurisdiction. Recipients should inform themselves of the restrictions that apply in their own jurisdiction. A failure to do so may result in a violation of securities laws in such jurisdiction.

This document does not constitute investment advice and has been prepared without taking into account the recipient's investment objectives, financial circumstances or particular needs and the opinions and recommendations in this representation are not intended to represent recommendations of particular investments to particular persons.

Recipients should seek professional advice when deciding if an investment is appropriate. All securities transactions involve risks, which include (among others) risks associated with mining, exploration, operations, resource, environment, funding and adverse or unanticipated market, financial, currency or political developments.

No responsibility for any errors or omissions from this document arising out of negligence or otherwise is accepted. This document does include forward-looking statements. Forward-looking statements are only predictions and are subject to risks, uncertainties and assumptions which are outside the control of the Company. Actual values, results, outcomes or events may be materially different to those expressed or implied in this announcement. Given these uncertainties, recipients are cautioned not to place reliance on forward-looking statements. Any forward-looking statements in this announcement speak only at the date of issue of this announcement. Subject to any continuing obligations under applicable law and ASX Listing Rules, the Company does not undertake any obligation to update or revise any information or any forward-looking statements in this document or any changes in events, conditions or circumstances on which any such forward-looking statement is based.

#### Appendix 1

# Reporting of kimberlite exploration results for the Lulo Project - JORC Code (2012) requirements Sampling Techniques and Data

Criteria JORC Code Explanation		Lucapa Commentary			
Sampling techniques	<ul> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.) These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul> <li>Sample KBS/164/02 was collected from 1 excavated pit and represents a separate geological unit to the first bulk sample (KBS/164/01).</li> <li>Sample KBS/056/01 was collected from a single pit and is the first of two samples planned from this target.</li> <li>The surface overburden was removed by excavator and truck before all earthmoving equipment was thoroughly cleaned.</li> <li>Each pit was then excavated into the clean kimberlite material and directly loaded into trucks for transport to the plant stockpile area The sample material was placed on a sterilised pad of sand before being fed into the plant by front-end loader.</li> <li>The sample location was chosen following the drilling of 9 delineation core holes for KBS/164/02 and 8 holes at KBS/056/01.</li> <li>The objective of the sample was to demonstrate whether potentially economic diamonds might be present in the kimberlite pipe and was not selected to be representative of the grade of the body as a whole.</li> <li>Separate pits were excavated to spread the sample over the surface area of the pipe to improve representivity of the sample.</li> </ul>			
Drilling techniques	• Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	<ul> <li>The drilling consisted of diamond core drilling. The drill core recovered was of HQ diameter.</li> <li>The original discovery holes were drilled to 97m (KBS/164/02) and 76m (KBS/056/01). All holes were drilled vertically. Delineation holes were drilled to 30-40m deep.</li> </ul>			
Drill sample recovery	<ul> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.         Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.     </li> </ul>	<ul> <li>Core is recovered from the core barrel and stored in core boxes, before being transported by light vehicle to the core shed.</li> <li>Core recovery is generally high, though significant core losses are experienced through unconsolidated surface sediments to about 2-3m depth at KBS/164/02 but to about 10m at KBS/056/01.</li> </ul>			

#### • Whether core and chip samples have been All core is visually and semi-quantitatively Logging geologically and geotechnically logged to a level logged then photographed at the operation's of detail to support appropriate Mineral core shed. Resource estimation, mining studies and The bulk sample pits were visually inspected to metallurgical studies. ensure no contamination of surface material • Whether logging is qualitative or quantitative in entered the sample material. nature. Core (or costean, channel, etc.) photography. • The total length and percentage of the relevant intersections logged. • If core, whether cut or sawn and whether • No sub-sampling was undertaken. Sub-sampling quarter, half or all core taken. All samples are to be treated in their entirety. techniques and • If non-core, whether riffled, tube sampled, rotary The result presented is an interim result based sample preparation split, etc. and whether sampled wet or dry. on the processing of a portion of the overall • For all sample types, the nature, quality and sample. appropriateness of the sample preparation technique. • Quality control procedures adopted for all subsampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled. • The nature, quality and appropriateness of the The samples were treated through the Quality of assay assaying and laboratory procedures used and Kimberlite Bulk Sample Plant ("KBSP"). The data and whether the technique is considered partial or plant was thoroughly decontaminated before laboratory tests sample treatment commenced. A layer of sand was used on the sample pad, • For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in beneath the deposited sample, to prevent determining the analysis including instrument sample loss or contamination between the make and model, reading times, calibrations sample and the ROM pad. factors applied and their derivation, etc. • Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. • The verification of significant intersections by No verification of samples or twinning has Verification of either independent or alternative company been undertaken, due to the bulk nature of the sampling and personnel. sample. assaying • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. Location of data Accuracy and quality of surveys used to locate The sample site was initially located using a hand-held GPS with a nominal accuracy of points drill holes (collar and down-hole surveys), trenches, mine workings and other locations about 5m. The final location was measured used in Mineral Resource estimation. using a Trimble Real-Time differential GPS system with an accuracy of <5cm. • Specification of the grid system used. • Quality and adequacy of topographic control. The grid system is WGS84 Zone 34L. Data spacing and • Data spacing for reporting of Exploration The sample positions and size were selected on distribution Results. the basis of giving the best likelihood of recovering diamonds and were not intended to

	<ul> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	•	return a grade representative of the pipe as a whole.  However, the distribution of 5 sampling pits over the surface of the body at L164 improves representivity. Material from all of these pits were composited into one sample for treatment. A further sample is planned at L056 to improve representivity.  The sample at L164 was additional to the previously reported sample (KBS/164/01) and was mined from a lithology that looks different to the main part of the body and was therefore treated separately.
Orientation of data in relation to geological structure	<ul> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul>		The samples are considered as bulk samples within the pipe. Orientation of the sample is not considered significant and is not expected to introduce bias.
Sample security	The measures taken to ensure sample security.		Security of the sampling and sample storage areas, processing and diamond recovery was continuously monitored by company and Angolan State Diamond Security personnel.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.		The sampling techniques are industry standard and no audits or reviews have been undertaken to validate the information presented at this stage.

# **Reporting of Exploration Results**

Criteria	JORC Code Explanation	Lucapa Commentary
Mineral tenement and land tenure status	<ul> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul> <li>The legislation covering the Angolan diamond industry stipulated that only Endiama (Empresa Nacional de Diamantes de Angola, the State Diamond Company) or joint ventures with Endiama (the Angolan State diamond mining company), can hold diamond mining rights.</li> <li>Under the terms of the two Lulo agreements, separate titles are granted for alluvial (secondary) and kimberlite (primary) exploration and/ or mining.</li> <li>Following successful alluvial exploration, a 10-year alluvial Mining Investment Contract was signed in July 2015 creating "Sociedade Mineira Do Lulo, LDA.", an Angolan incorporated company in which Lucapa Diamond Company Ltd has a 40% shareholding, Endiama 32% and Rosas &amp; Petalas S.A. 28%. This Angolan entity was officially incorporated in May 2016.</li> <li>Following a renewal application for kimberlite exploration, a new 5-year Mineral Investment Contract was signed and gazetted in May 2019, expiring on 2 May 2024. Interests held in this exploration venture are Endiama 51%, Lucapa Diamond Company Ltd 39%* and Rosas &amp; Petalas S.A. 10% (*interest will be reduced to</li> </ul>

Criteria	JORC Code Explanation	Lucapa Commentary
		30% after recoupment of the exploration and mining development investments).
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul> <li>Limited exploration has been undertaken by state-controlled entities and joint ventures Diamang and Condiama.</li> <li>Parts of the area have been exploited by artisanal miners – no records of this work are available.</li> </ul>
Geology	Deposit type, geological setting and style of mineralisation.	<ul> <li>Significant diamond bearing alluvial systems, of Mesozoic to Recent ages overlie a major, but relatively poorly explored, kimberlite field. The kimberlite pipes intrude flat-lying Proterozoic sediments within the Lucapa Graben. The kimberlite field is believed to be the source of the alluvial diamonds.</li> </ul>
Drill hole Information	<ul> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:         <ul> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth hole length.</li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul> </li> </ul>	No drill hole information is presented here as it is not relevant to the sampling process other than to guide location of the sample.  No drill hole information is presented here as it is not relevant to the sampling process other than to guide location of the sample.
Data aggregation methods	<ul> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul> <li>No weighting, averaging, grade truncations or cut-off grades have been used.</li> <li>No short or long length aggregation applicable.</li> <li>No metal equivalent values are used.</li> </ul>
Relationship between mineralisation widths and intercept lengths	<ul> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</li> </ul>	The deposits may be regarded as massive deposits so sample orientation is not relevant.
Diagrams	<ul> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view</li> </ul>	<ul> <li>Appropriate map and plans for the reported mineralisation with scale and north points are included with the text of the report.</li> </ul>

Criteria	JORC Code Explanation	Lucapa Commentary			
	of drill hole collar locations and appropriate sectional views.				
Balanced reporting	<ul> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	Results reported are complete for the samples treated.			
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	The sample KBS/164/01 was recovered from L164, which is a kimberlite pipe that was positively identified during drilling on the licence area in 2017. The pipe is estimated to extend for approximately 3.5ha.			
Further work	<ul> <li>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>	<ul> <li>kimberlites in the Canguige catchment and surrounding areas will continue.</li> <li>Drilling will continue on the priority targets identified to locate material suitable for bulk sampling.</li> </ul>			

# Section 3 (resources) does NOT apply to this announcement

# Section 4 (reserves) does NOT apply to this announcement

## **Estimation and Reporting of Diamonds and Other Gemstones**

Criteria	JORC Code Explanation	Lucapa Commentary
Indicator minerals	<ul> <li>Reports of indicator minerals, such as chemically/physically distinctive garnet, ilmenite, chrome spinel and chrome diopside, should be prepared by a suitably qualified laboratory.</li> </ul>	No indicator minerals were recovered from these samples.
Source of diamonds	Details of the form, shape, size and colour of the diamonds and the nature of the source of diamonds (primary or secondary) including the rock type and geological environment.	<ul> <li>13 diamonds weighing a total of 7.85 carats (pre-acid) were recovered from processing of kimberlite sample KBS/056/01.</li> <li>23 diamonds weighing a total of 16.32 carats (pre-acid) were recovered from processing of the kimberlite sample KBS/164/02.</li> </ul>
Sample collection	<ul> <li>Type of sample, whether outcrop, boulders, drill core, reverse circulation drill cuttings, gravel, stream sediment or soil, and purpose (e.g. large diameter drilling to establish stones per unit of volume or bulk samples to establish stone size distribution).</li> <li>Sample size, distribution and representivity.</li> </ul>	<ul> <li>Overburden of approximately 2m thick (L164) and 10m (L056) overlaying the kimberlite was removed using a Volvo 480 excavator and 3 x ADT trucks.</li> <li>The sample pit was excavated and material from the pit transported to a prepared sample pad made up of pre-processed alluvial gravels and a layer of red sand which had been deposited to prevent contamination between the sample and the pre-existing ROM pad.</li> </ul>

Criteria	JORC Code Explanation	Lucapa Commentary			
Sample treatment	<ul> <li>Type of facility, treatment rate, and accreditation.</li> <li>Sample size reduction. Bottom screen size, top screen size and re-crush.</li> <li>Processes (dense media separation, grease, X-ray, hand-sorting, etc.).</li> <li>Process efficiency, tailings auditing and granulometry.</li> <li>Laboratory used type of process for micro diamonds and accreditation.</li> </ul>	<ul> <li>The sample was treated through the Kimberlite Bulk Sample Plant (KBSP). The KBSP is comprised of a front-end feed arrangement, followed by a scrubber and a double deck screen, which splits the material into coarse and fine streams. Coarse material (+18mm) is screened off and collected on an oversize stockpile. Fine material (&gt;1.5mm) is processed through a DMS (dense media separation) unit, with DMS concentrate processed through a Flowsort X-Ray diamond recovery unit. Final diamond recovery is undertaken by hand sorting of the Flowsort concentrates. All -1.5mm material is pumped to a tailings storage facility.</li> <li>+18mm material is stockpiled and intermittently fed through crushing circuits, both primary and secondary jaw crushers. The product from the secondary crusher deposits onto a screen. Material remaining as oversize is recirculated through the secondary crusher until it passes the cut-point of 18 mm, after which it passes into the DMS.</li> <li>The plant was thoroughly decontaminated before sample treatment commenced.</li> <li>A layer of sand was used on the sample pad, beneath the deposited sample, to prevent sample loss or contamination between the</li> </ul>			
Carat	One fifth (0.2) of a gram (often defined as a metric carat or MC).	sample and the ROM pad.      Reported as carats.			
Sample grade	<ul> <li>Sample grade in this section of Table 1 is used in the context of carats per units of mass, area or volume.</li> <li>The sample grade above the specified lower cutoff sieve size should be reported as carats per dry metric tonne and/or carats per 100 dry metric tonnes. For alluvial deposits, sample grades quoted in carats per square metre or carats per cubic metre are acceptable if accompanied by a volume to weight basis for calculation.</li> <li>In addition to general requirements to assess volume and density there is a need to relate stone frequency (stones per cubic metre or tonne) to stone size (carats per stone) to derive sample grade (carats per tonne).</li> </ul>	The total sample results for KBS/164/02 at KBS/56/01 are summarised in the table belo  Sample ID Volume Processed m³ recovered (cts)  KBS/164/02 351 23 16.32 4.65  KBS/056/01 902 13 7.85 0.87  The volume processed is based on count loader buckets fed to the plant, converted m³ stockpile volumes using an establish bucket factor previously reconciled to survey broken material on a stockpile, measured metres cubed. Tonnage treated (whe reported) is based on a bucket factor reconcil to a weightometer unit on the plant which wonly operational for a portion of the treatme of the sample. This bucket factor has be applied to the remainder of the sample.			
Reporting of Exploration Results	<ul> <li>Complete set of sieve data using a standard progression of sieve sizes per facies. Bulk sampling results, global sample grade per facies. Spatial structure analysis and grade distribution. Stone size and number distribution. Sample head feed and tailings particle granulometry.</li> <li>Sample density determination.</li> <li>Per cent concentrate and undersize per sample.</li> </ul>	<ul> <li>applied to the remainder of the sample.</li> <li>36 diamonds weighing a total of 24.17 carat were recovered from processing of th kimberlite samples.</li> <li>A size distribution for the two samples i shown in the table below split by standard DT sieve sizes.:</li> </ul>			

Criteria	JORC Code Explanation	Lucapa Commentary					
	Sample grade with change in bottom cut-off		KBS/0	KBS/056/01		KBS/164/02	
	screen size.	Size Class	Stones	Carats	Stones	Carats	
	Adjustments made to size distribution for	+19			1	2.38	
	sample plant performance and performance on	+17	1	2.08	2	3.95	
	a commercial scale.	+13	1	0.95	3	3.00	
	If appropriate or employed, geostatistical	+12	2	1.44	4	2.91	
	techniques applied to model stone size,	+11	5	2.22	4	1.77	
	distribution or frequency from size distribution	+9	3	0.97	6	1.83	
	of exploration diamond samples.	+7	1	0.19	2	0.36	
	, ,	+6			1	0.12	
	The weight of diamonds may only be omitted	Total	13	7.85	23	16.32	
	from the report when the diamonds are considered too small to be of commercial significance. This lower cut-off size should be stated.						
Grade	Description of the sample type and the spatial	<ul> <li>No diam</li> </ul>	nond resc	ources are	e reporte	d.	
estimation for	arrangement of drilling or sampling designed for	<ul> <li>No diam</li> </ul>	nond rese	erves are	reported		
reporting	grade estimation.				•		
Mineral	• The sample crush size and its relationship to						
Resources and	that achievable in a commercial treatment						
Ore Reserves	plant.						
	Total number of diamonds greater than the						
	specified and reported lower cut-off sieve size.						
	• Total weight of diamonds greater than the						
	, , ,						
	specified and reported lower cut-off sieve size.						
	• The sample grade above the specified lower cut- off sieve size.						
Value	Valuations should not be reported for samples of	<ul> <li>No diam</li> </ul>	าond valu	ie estima	ites are r	eported.	
estimation	diamonds processed using total liberation						
	method, which is commonly used for processing						
	exploration samples.						
	• To the extent that such information is not						
	deemed commercially sensitive, Public Reports						
	should include:						
	<ul> <li>diamonds quantities by appropriate screen size</li> </ul>						
	per facies or depth.						
	, ,						
	details of parcel valued.						
	• number of stones, carats, lower size cut-off per						
	facies or depth.						
	The average \$/carat and \$/tonne value at the						
	selected bottom cut-off should be reported in US						
	Dollars. The value per carat is of critical						
	importance in demonstrating project value.						
	The basis for the price (e.g. dealer buying price,						
	dealer selling price, etc.).						
	An assessment of diamond breakage.						
	• Ан иззеззитент ој ининтони отеикиуе.						

### DIAMONDS RECOVERED FROM TWO LULO KIMBERLITE BULK SAMPLES

Criteria	JORC Code Explanation	Lucapa Commentary					
Security and integrity	<ul> <li>Accredited process audit.</li> <li>Whether samples were sealed after excavation.</li> <li>Valuer location, escort, delivery, cleaning losses, reconciliation with recorded sample carats and number of stones.</li> <li>Core samples washed prior to treatment for micro diamonds.</li> <li>Audit samples treated at alternative facility.</li> <li>Results of tailings checks.</li> <li>Recovery of tracer monitors used in sampling and treatment.</li> <li>Geophysical (logged) density and particle density.</li> <li>Cross validation of sample weights, wet and dry, with hole volume and density, moisture factor.</li> </ul>	<ul> <li>There has been no accredited process audit.</li> <li>Samples were continuously monitored by mine security personnel and Angolan State diamond security personnel during transport and storage.</li> <li>Microdiamonds were not processed.</li> <li>No audit samples were collected because of the nature of the samples.</li> <li>Tailings have not been checked for indicators.</li> <li>Geophysical densities were not determined.</li> <li>Sample volume has been calculated based on surveyed in-situ pit volumes.</li> </ul>					
Classification	• In addition to general requirements to assess volume and density there is a need to relate stone frequency (stones per cubic metre or tonne) to stone size (carats per stone) to derive grade (carats per tonne). The elements of uncertainty in these estimates should be considered, and classification developed accordingly.	No resource is classified in this report.					